


High-precision, 3-channel power meter with built-in harmonic measurement

Accurately measure devices up to 1000 V/65 A AC/DC with direct input

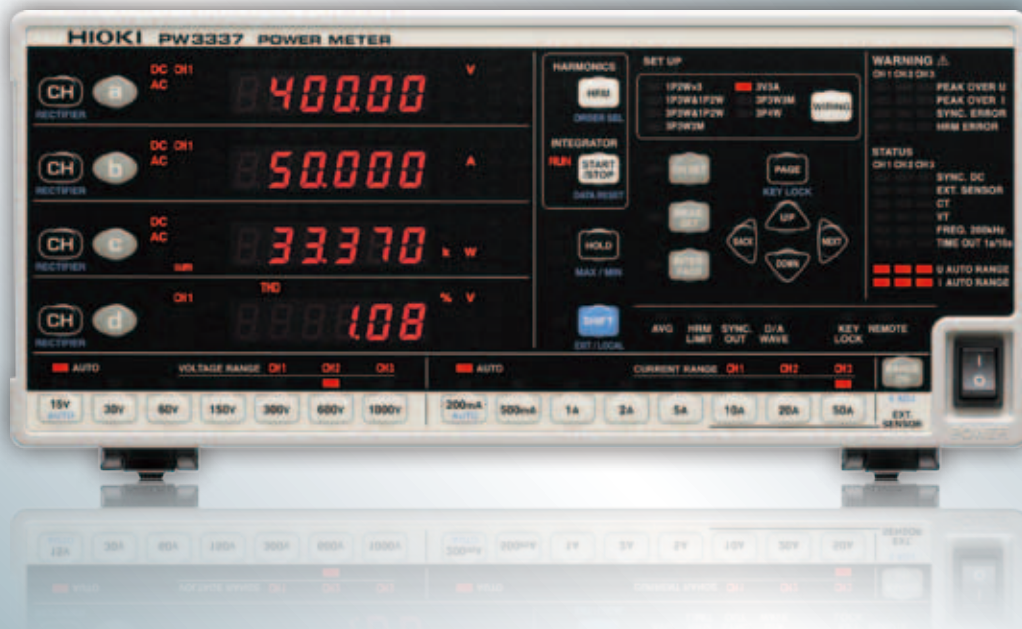

The PW3336 (2-channel) and PW3337 (3-channel) can measure DC and a variety of power connections ranging from single-phase 2-wire to 3-phase 4-wire\*.

- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- Assess and verify the energy-saving performance of industrial equipment such as heavy machinery, air-conditioners as well as household appliances

- Voltage, current, and power basic accuracy :  $\pm 0.1\%$  \*\*
- Measurement frequency bands : DC, 0.1 Hz to 100 kHz
- High-current measurement : Up to 65 A, direct input
- Low-loss current input : Input resistance of 1m $\Omega$  or less
- Harmonic measurement up to the 50th order : IEC 61000-4-7 compliant
- High-accuracy measurement, even with a low power factor : Ideal for no-load testing of transformers and motors
- Measure up to 5000 A AC : Built-in external sensor input terminals

High-accuracy  
High-current  
Harmonic measurement

Support for development and production of motors, transformers, air-conditioners, and other industrial equipment



The PW3336 series (2-channel) and PW3337 series (3-channel) are easy-to-use, high-accuracy power meters that deliver current measurement of up to 65 A with direct input as well as built-in harmonic analysis functionality, all with accuracy that exceeds that of previous HIOKI power meters.

World class performance

## Measure up to 65 A with direct input

### 1 Measurement accuracy that remains unchanged for high-current measurement

Accuracy is guaranteed for currents of up to 65 A with direct input. The power meters can also measure high currents in excess of 65 A with optional current sensors. Direct-input power meters typically exhibit degraded accuracy when inputting high currents due to shunt resistor self-heating. However, the PW3336 and PW3337 reduce input resistance with a DCCT design that virtually eliminates this type of accuracy degradation.

2mA	<b>65A</b>	5000A
	<b>Direct input</b>	Sensor input



### 2 A 3-channel power meter

Enabling you to select the optimal range for each connection. The advanced engineering of the PW3336 and PW3337 enables you to measure an inverter's primary-side DC power supply and its secondary-side 3-phase output at the same time. The power meters make a tremendous contribution in applications that need to measure the input/output efficiency of inverters, uninterruptible power supplies, and other power supply equipment.

Configure multiple ranges with a single instrument



### 3 Best-in-class accuracy of $\pm 0.1\%$ \*

Highest basic accuracy and DC accuracy of any instrument in its class

Thanks to Hioki's accumulated technology and track record, the PW3336/PW3337 delivers the highest basic accuracy and DC accuracy of any instrument in its class. Reliable measurement accuracy ensures robust performance in customers' measurement applications.

$\pm 0.1\%$  \*

\* For complete details, please refer to the specifications.


# Simultaneously measure power consumption and all harmonic parameters, from single-phase 2-wire to 3-phase 4-wire measurement lines

2ch



PW3336 series (2-channel models)  
Measurement lines: 1P2W/1P3W/3P3W

3ch

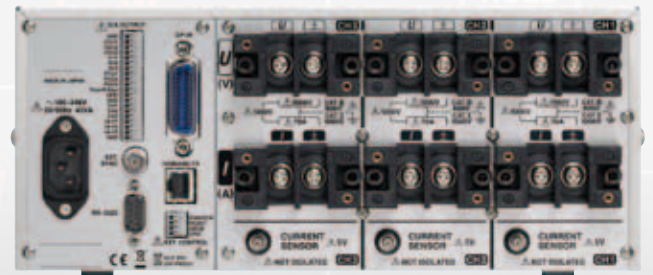


PW3337 series (3-channel models)  
Measurement lines: 1P2W/1P3W/3P3W/3P4W

## World class performance


### 4 Simultaneous processing of power data and all harmonic data

All data, including RMS values, mean values, DC components, AC components, fundamental wave components, harmonic measurement, and integration measurement, is processed in parallel internally. There is no need to switch modes depending on whether you wish to acquire power data or harmonic data - simply switch the display to obtain measured values with true simultaneity. Additionally, PC communications software can be used to capture measurement data, including from multiple synchronized instruments.

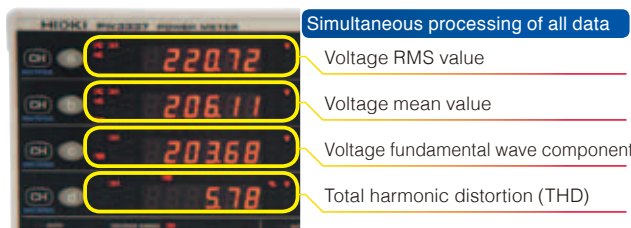

### 6 Wide frequency band of DC and 0.1 Hz to 100 kHz

Thanks to a wide-band capability extending from DC and 0.1 Hz to 100 kHz, the PW3336/PW3337 can cover not only inverters' fundamental frequency band, but also the carrier frequency band.

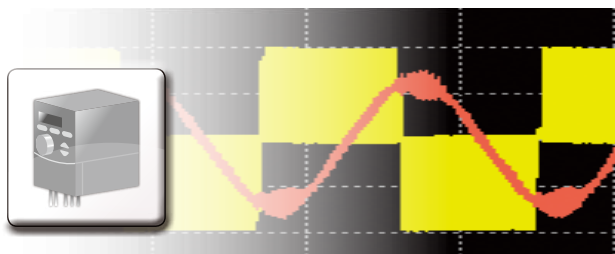


### 5 High-accuracy measurement, even with low-power-factor input

Because power factor has little impact at just  $\pm 0.1\%$  f.s., the PW3336/PW3337 can measure active power of low-power-factor input at a high level of accuracy, for example during no-load-loss testing, a technique that is used to evaluate energy-saving performance of transformers. Even though the high current waveform crest factor that typically accompanies no-load operation causes the power factor to deteriorate, measurements taken with the PW3336/PW3337 series remain accurate under these conditions.



### 7 Integrating fluctuating power values

The power consumption of equipment subject to a fluctuating load, for example refrigerators, heaters, and pumps, varies considerably between rated operation and no-load operation. Thanks to its broad dynamic range, the PW3336/PW3337 can perform integrated power measurement with guaranteed accuracy using a single range, even if the power fluctuates dramatically during integration. Measurements can accommodate waveform peaks of up to 600% of the range rating.

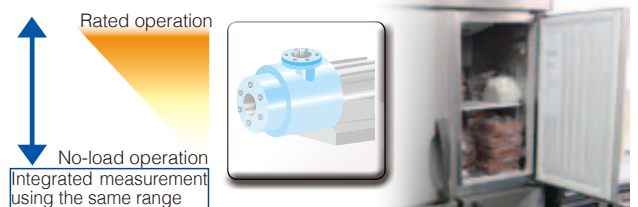

## Advanced functions

### 1 Extensive built-in features including harmonic measurement, current sensor input, synchronized control, and a wide selection of interfaces

The PW3336/PW3337 ships standard with all the functionality you need for measurement. Choose from a total of eight models depending on whether your application requires support for GP-IB communications and D/A output.

Standard functionality by model

● : Built-in function — : Function not available

Model	No. of channels	Harmonic measurement	Current sensor input	Synchronized control	LAN	RS-232C	GP-IB	D/A output
PW3336	2	●	●	●	●	●	—	—
PW3336-01		●	●	●	●	●	●	—
PW3336-02		●	●	●	●	●	—	●
PW3336-03		●	●	●	●	●	●	●
PW3337	3	●	●	●	●	●	—	—
PW3337-01		●	●	●	●	●	●	—
PW3337-02		●	●	●	●	●	—	●
PW3337-03		●	●	●	●	●	●	●

### 2 IEC61000-4-7 compliant harmonic measurement

The PW3336/PW3337 supports measurement that complies with IEC 61000-4-7:2002, the international standard governing harmonic measurement.


The power meters can measure voltage, current, and power harmonics up to the 50th order depending on the fundamental frequency, including total harmonic distortion (THD), fundamental wave component, harmonic level, phase difference, content percentage, and other parameters for each order. Since you can cap the number of orders for which harmonic analysis is performed to any order from the 2nd to the 50th, you can make standard-compliant calculations, even if the standard defines an upper limit order for THD calculations.

#### About IEC 61000-4-7

IEC 61000-4-7 is an international standard governing the measurement of harmonic current and harmonic voltage in power supply systems as well as harmonic current emitted from devices. It defines the performance of standard instruments used to make such measurements.

### 3 Large selection of interfaces

The PW3336/PW3337's interfaces can be used to control the instrument and to capture its data - simply download the free PC application from the HIOKI website. Functionality supported via LAN connections includes power meter configuration, measured value monitoring, waveform monitoring, display of time-series recordings, and capturing data at intervals.



PW3336-03  
PW3337-03

### 4 16-channel D/A output (-02, -03)

D/A output-equipped instruments can generate voltage output for measured values and integrated power with their 16-bit D/A converter. By connecting an external data logger, HIOKI Memory HiCorder, recorder, or other device, you can simultaneously record data along with temperature and other non-power signals. The PW3336/PW3337 also offers the first active power level output on a cycle-by-cycle basis of any instrument in its class.

#### Three types of D/A output (switchable)

##### Instantaneous waveform output


Output voltage, current, or power instantaneous waveforms. (Sampling speed: Approx. 87.5 kHz)

##### Level output

Output voltage, current, power, and other selected parameters with an update cycle of approximately 200 ms.

##### High-speed active power level output


Generate level output for the active power for each cycle of the measurement waveform.

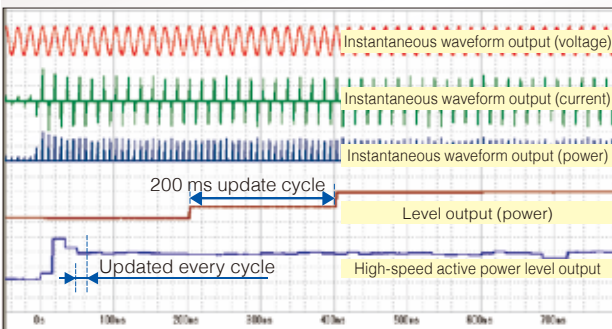

D/A output waveforms when a fan motor is powered on


### 5 Synchronized control using up to 8 instruments

Eight units of PW3336/PW3337 can be connected and their measurements fully synchronized. That means you can have up to 24 channels of simultaneous calculations, display updates, data updates, integration control, display hold timing, and zero-adjustment. In addition, the master-slave configuration allows you to key lock all slave devices with the master unit, mirroring the master unit's operations and modes on all of the other power meters. The free PC application can be used to calculate efficiency values across multiple units.

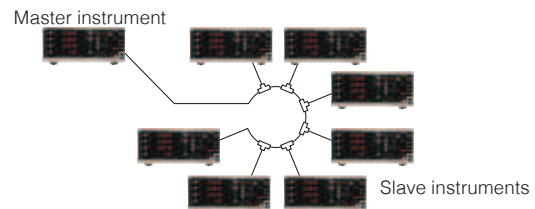

### 6 Current sensor connectivity

The PW3336/PW3337 can also measure devices that exceed 65 A with the use of an optional current sensor. Measurements with guaranteed accuracy can be performed for currents of up to 5000 A AC. Choose from a range of high-accuracy, clamp or pass-through AC/DC current sensors and models specifically designed for 50/60 Hz measurement.

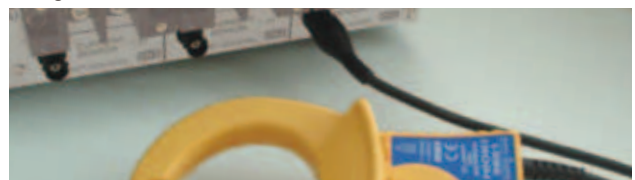


## Applications

### 1 Research, development, and testing of equipment with 3-phase power supplies such as transformers, motors, air-conditioners, and heavy machinery

#### Key advantages

- ✓ Measure 3-phase 3-wire and 3-phase 4-wire\* lines with a basic measurement accuracy of  $\pm 0.1\%$ \*\*
- ✓ Perform high-current measurement of 65 A with direct input without accuracy degradation caused by shunt resistor self-heating.
- ✓ Built-in IEC 61000-4-7 compliant harmonic measurement functionality as well as current sensor input terminals and a LAN interface.
- ✓ Accuracy is guaranteed for active power measurement from 0 W, as well as for measurement of integrated power for loads with large fluctuations.
- ✓ Measure active power at a high level of accuracy even with low power factors, for example during no-load operation testing of transformers.

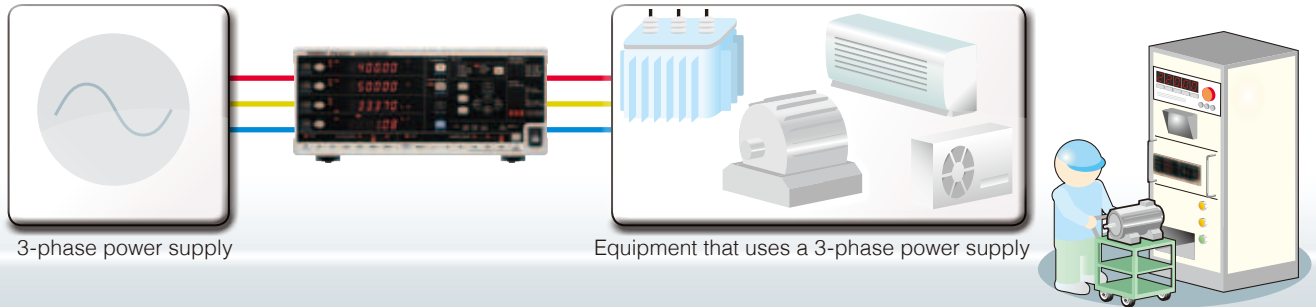


\*3-phase 4-wire measurement: PW3337 series only \*\* For complete details, please refer to the specifications.

### 2 Measuring the efficiency of power conditioners used in solar power installations

#### Key advantages

- ✓ Measure primary-side DC and secondary-side 3-phase output with a single PW3337, using the optimal range for each.
- ✓ Calculate efficiency: Perform output/input calculations and easily identify the resulting efficiency on the power meter's screen.
- ✓ Ripple rate calculation: Display the ratio of the AC component that is superposed on a DC line.
- ✓ Built-in current sensor input terminals: Measure currents exceeding 65 A with an optional current sensor.
- ✓ Harmonic measurement: Test for harmonic components such as voltage THD, which can be a concern with grid-linked systems.

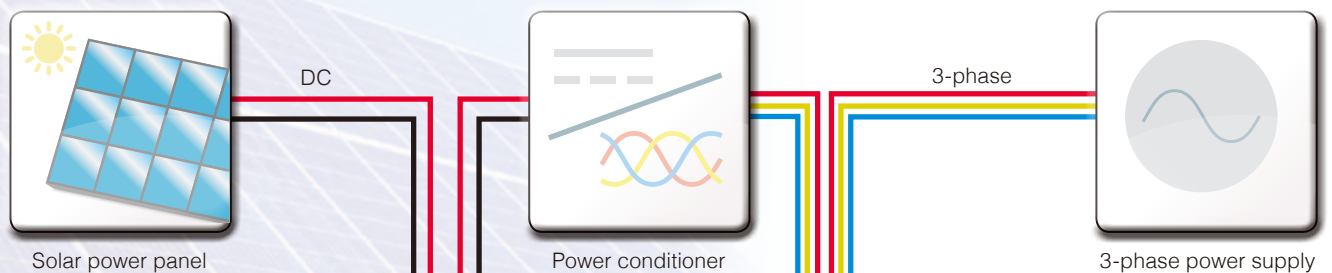


#### Other DC/3-phase and 1-phase/3-phase measurement applications

- ✓ Measuring the efficiency of battery-powered devices (DC/3-phase) such as electric vehicles
- ✓ Measuring the efficiency of rapid chargers for electric vehicles (3-phase/DC)

### 3 Measuring power supply devices such as 3-phase/3-phase inverters

#### Key advantages


- ✓ Connect multiple instruments to synchronize their operation, including display updates, data updates, and start of integration.
- ✓ Measure all data with simultaneous parallel processing, including RMS values, mean values, fundamental wave components, THD, and harmonic components.
- ✓ Wide frequency band from DC and 0.1 Hz to 100 kHz: Enjoy coverage for the inverter secondary-side frequency band.
- ✓ Built-in current sensor input terminals: Measure currents exceeding 65 A with an optional current sensor.

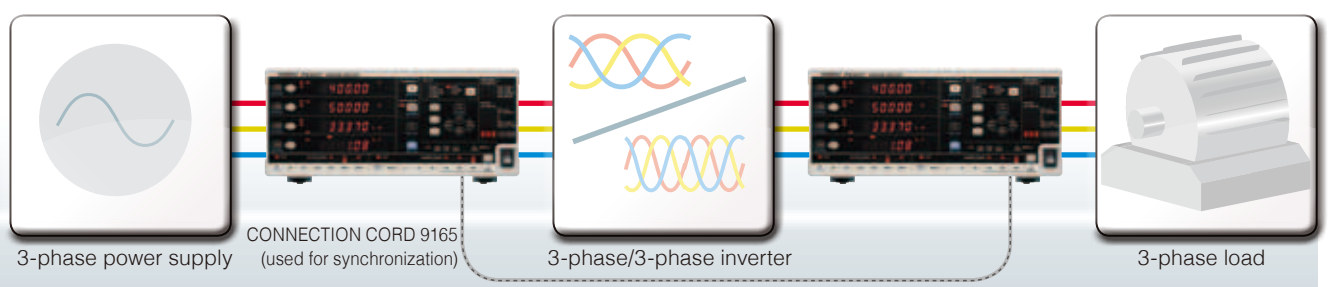

## 4 Measuring the primary-side, internal circuitry, and secondary-side power consumption in uninterruptible power supplies (UPS)

### Key advantages


- ✓ Set individual ranges and measurement types for each channel. Measure power consumption at each stage of the UPS.
- ✓ Hold waveform peak values and measured value maximum and minimum values.
- ✓ Measure all data with simultaneous parallel processing, including RMS values, mean values, fundamental wave components, THD, and harmonic components.

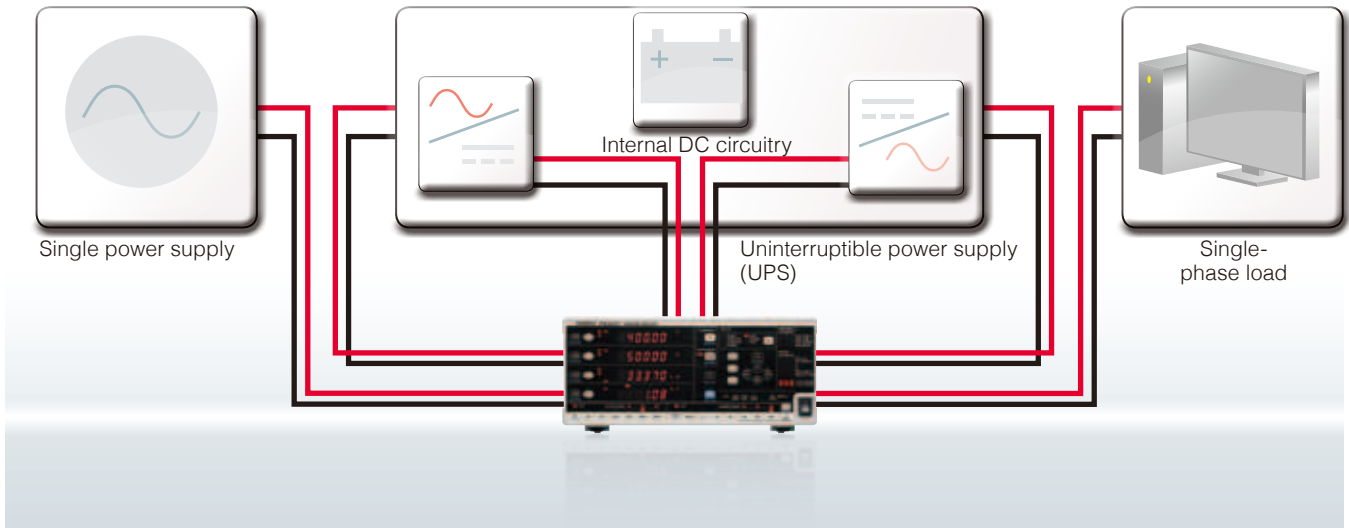

## 5 Simultaneous measurement of multiple loads

### Key advantages


- ✓ Set individual ranges and measurement types for each channel. Measure power consumption at each stage of an uninterruptible power supply.
- ✓ Perform integrated measurement of widely fluctuating power signals without changing the range - useful during long-term integrated power evaluation tests.
- ✓ Use the synchronized control function to sync measurement timing and start/stop integration across a maximum of 8 power meters.

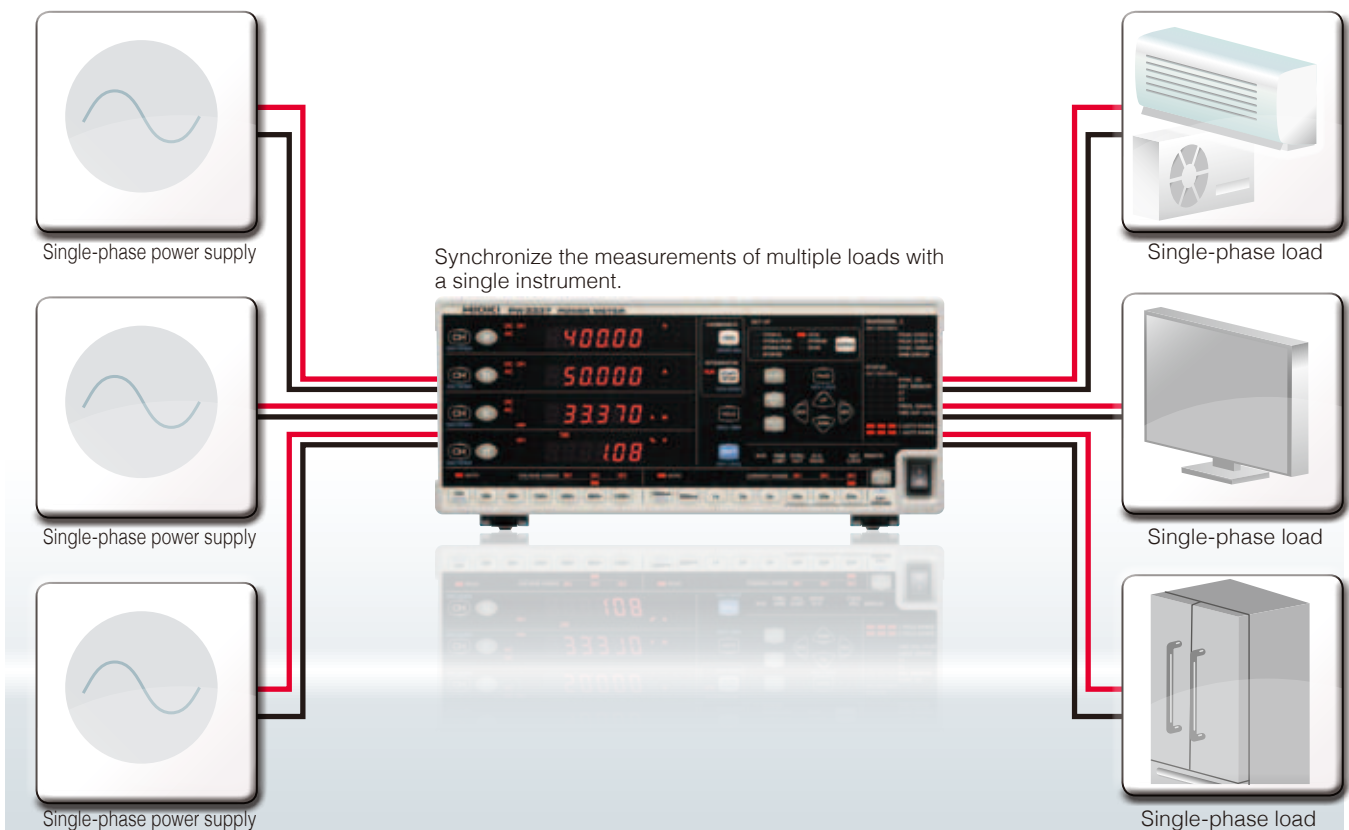

Software

**PW3336/PW3337 Communicator**


The PW3336/PW3337 Communicator connects with the power meters via the LAN, RS-232C, or GP-IB (-01, -03) interface, and is available for free download from the HIOKI website. Functionality includes configuring instruments, capturing interval data, performing numerical calculations based on measurement data, calculating efficiency values across multiple units, displaying 10 or more measurement parameters, and displaying waveforms.

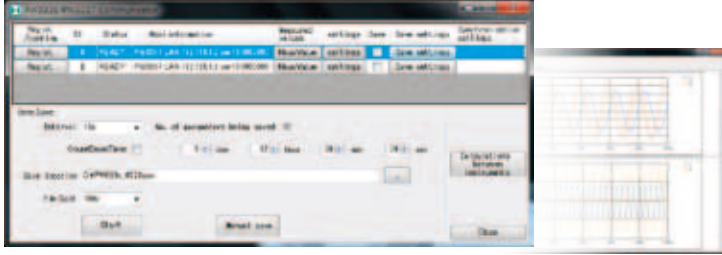

**LabVIEW Driver**

Use LabVIEW\* to collect data and integrate the power meter into existing systems.  
 \*LabVIEW is a trademark of National Instruments Corporation.

Dimensional drawings

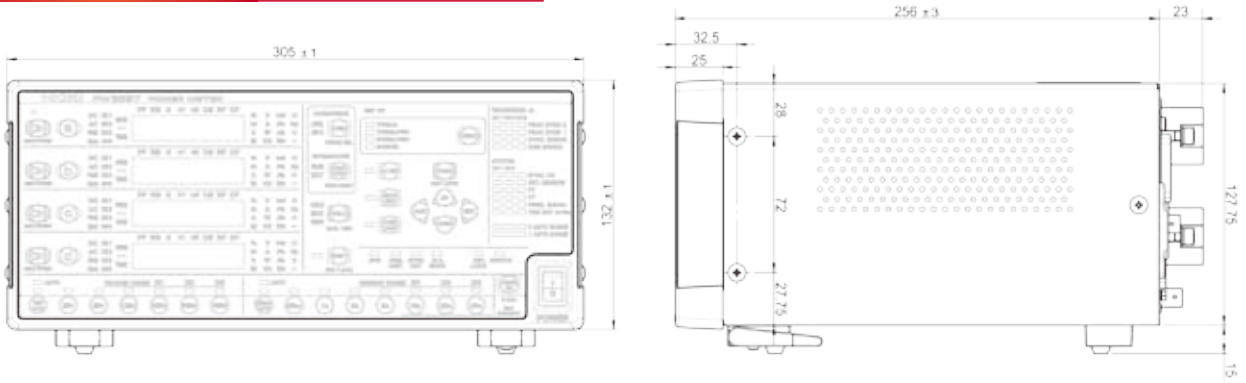

(Unit: mm)

Specifications

Input Specifications

Measurement line type	PW3336 series Single-phase 2-wire (1P2W), Single-phase 3-wire (1P3W), Three-phase 3-wire (3P3W, 3P3W2M)			
	Wiring	CH1	CH2	
	1P2Wx2	1P2W	1P2W	
	1P3W	1P3W		
	3P3W	3P3W		
	3P3W2M	3P3W2M		
	PW3337 series Single-phase 2-wire (1P2W), Single-phase 3-wire (1P3W), Three-phase 3-wire (3P3W, 3P3W2M, 3V3A, 3P3W3M), Three-phase 4-wire (3P4W)			
	Wiring	CH1	CH2	CH3
	1P2Wx3	1P2W	1P2W	1P2W
	1P3W&1P2W	1P3W		1P2W
	3P3W&1P2W	3P3W		1P2W
	3P3W2M	3P3W2M		
	3V3A	3V3A		
	3P3W3M	3P3W3M		
	3P4W	3P4W		
Input methods	Voltage Isolated input, resistance voltage division method Current Isolated input, DCCCT method Isolated input from current sensors			
Voltage measurement ranges	AUTO/ 15.000 V/ 30.000 V/ 60.000 V/ 150.00 V/ 300.00 V/ 600.00 V/ 1000.0 V (set for each wiring mode)			
Current measurement ranges	AUTO/ 200.00 mA/ 500.00 mA/ 1.0000 A/ 2.0000 A/ 5.0000 A / 10.000 A/ 20.000 A/ 50.000 A (set for each wiring mode) For more information about external current sensor input, see the external current sensor input specifications			
Power ranges	Depends on the combination of voltage and current ranges; PW3336: from 3.0000W to 100.00kW (also applies to VA, var) PW3337: from 3.0000W to 150.00kW (also applies to VA, var)			
Input resistance (50/60 Hz)	Voltage input terminal : 2 MΩ±0.04 MΩ Current direct input terminal : 1 mΩ or less			

Frequency bands	DC, 0.1 Hz to 100 kHz
Synchronization sources	U1, U2, U3, I1, I2, I3, DC (fixed at 200 ms) Can be set separately for each wiring mode.
Measurement items	<ul style="list-style-type: none"> <li>· Voltage</li> <li>· Reactive power</li> <li>· Efficiency</li> <li>· Voltage waveform peak value</li> <li>· Voltage crest factor</li> <li>· Time average current</li> <li>· Voltage ripple factor</li> <li>Harmonic parameters:                             <ul style="list-style-type: none"> <li>· Harmonic voltage RMS value</li> <li>· Total harmonic voltage distortion</li> <li>· Total harmonic current distortion</li> <li>· Current fundamental waveform</li> <li>· Apparent power fundamental waveform</li> <li>· Power factor fundamental waveform (displacement power factor)</li> <li>· Voltage current phase difference fundamental waveform</li> <li>· Interchannel voltage fundamental wave phase difference</li> <li>· Interchannel current fundamental wave phase difference</li> <li>· Harmonic voltage content %</li> <li>· Harmonic active power content %</li> </ul> </li> </ul> The following parameters can be downloaded as data during PC communication but not displayed: <ul style="list-style-type: none"> <li>· Harmonic voltage phase angle</li> <li>· Harmonic current phase angle</li> <li>· Harmonic voltage current phase difference</li> </ul>
Rectifiers	AC+DC : AC+DC measurement Display of true RMS values for both voltage and current AC+DC Umn : AC+DC measurement Display of average value rectified RMS converted values for voltage and true RMS values for current DC : DC measurement Display of simple averages for both voltage and current Display of values calculated by (voltage DC value) x (current DC value) for active power AC : AC measurement Display of values calculated by for both voltage and current Display of values calculated by $\sqrt{(AC+DC \text{ value})^2 - (DC \text{ value})^2}$ for active power FND Extraction and display of the fundamental wave component from harmonic measurement
Zero-Crossing Filter	500 Hz/200 kHz 500 Hz: 0.1 Hz to 500 Hz, 200 kHz: 0.1 Hz to 200 kHz
Maximum effective peak voltage	±600% of each voltage range However, for 300 V, 600 V, and 1000 V ranges, ±1500 Vpeak
Maximum effective peak current	±600% of each current range However, for 20 A range and 50 A range, ±100 Apeak

Basic Measurement Specifications

Measurement method	Simultaneous voltage and current digital sampling, zero-cross simultaneous calculation
Sampling frequency	Approx. 700 kHz
A/D converter resolution	16-bit

Measurement accuracy Voltage			
Frequency (f)	Input < 50% f.s.	50% f.s. ≤ Input < 100% f.s.	100% f.s. ≤ Input
DC	±0.1%rdg, ±0.1%f.s.	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.
0.1Hz ≤ f < 16Hz	±0.1%rdg, ±0.2%f.s.	±0.3%rdg.	±0.3%rdg.
16Hz ≤ f < 45Hz	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.	±0.2%rdg.
45Hz ≤ f ≤ 66Hz	±0.1%rdg, ±0.05%f.s.	±0.15%rdg.	±0.15%rdg.
66Hz < f ≤ 500Hz	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.	±0.2%rdg.
500Hz < f ≤ 10kHz	±0.1%rdg, ±0.2%f.s.	±0.3%rdg.	±0.3%rdg.
10kHz < f ≤ 50kHz	±0.5%rdg, ±0.3%f.s.	±0.8%rdg.	±0.8%rdg.
50kHz < f ≤ 100kHz	±2.1%rdg, ±0.3%f.s.	±2.4%rdg.	±2.4%rdg.

Current (direct input)			
Frequency (f)	Input < 50% f.s.	50% f.s. ≤ Input < 100% f.s.	100% f.s. ≤ Input
DC	±0.1%rdg, ±0.1%f.s.	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.
0.1Hz ≤ f < 16Hz	±0.1%rdg, ±0.2%f.s.	±0.3%rdg.	±0.3%rdg.
16Hz ≤ f < 45Hz	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.	±0.2%rdg.
45Hz ≤ f ≤ 66Hz	±0.1%rdg, ±0.05%f.s.	±0.15%rdg.	±0.15%rdg.
66Hz < f ≤ 500Hz	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.	±0.2%rdg.
500Hz < f ≤ 1kHz	±0.1%rdg, ±0.2%f.s.	±0.3%rdg.	±0.3%rdg.
1kHz < f ≤ 10kHz	±(0.03+0.07×F)%rdg, ±0.2%f.s.	±(0.23+0.07×F)%rdg.	±(0.23+0.07×F)%rdg.
10kHz < f ≤ 100kHz	±(0.3+0.04×F)%rdg, ±0.3%f.s.	±(0.6+0.04×F)%rdg.	±(0.6+0.04×F)%rdg.

Active power			
Frequency (f)	Input < 50% f.s.	50% f.s. ≤ Input < 100% f.s.	100% f.s. ≤ Input
DC	±0.1%rdg, ±0.1%f.s.	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.
0.1Hz ≤ f < 16Hz	±0.1%rdg, ±0.2%f.s.	±0.3%rdg.	±0.3%rdg.
16Hz ≤ f < 45Hz	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.	±0.2%rdg.
45Hz ≤ f ≤ 66Hz	±0.1%rdg, ±0.05%f.s.	±0.15%rdg.	±0.15%rdg.
66Hz < f ≤ 500Hz	±0.1%rdg, ±0.1%f.s.	±0.2%rdg.	±0.2%rdg.
500Hz < f ≤ 1kHz	±0.1%rdg, ±0.2%f.s.	±0.3%rdg.	±0.3%rdg.
1kHz < f ≤ 10kHz	±(0.03+0.07×F)%rdg, ±0.2%f.s.	±(0.23+0.07×F)%rdg.	±(0.23+0.07×F)%rdg.
10kHz < f ≤ 50kHz	±(0.07×F)%rdg, ±0.3%f.s.	±(0.3+0.07×F)%rdg.	±(0.3+0.07×F)%rdg.
50kHz < f ≤ 100kHz	±(0.6+0.07×F)%rdg, ±0.3%f.s.	±(0.9+0.07×F)%rdg.	±(0.9+0.07×F)%rdg.

- Values for f.s. depend on measurement ranges.
- "F" in the tables refers to the frequency in kHz.
- Add ±1mA to DC measurement accuracy for current.
- Add (±1mA) × (voltage read value) to DC measurement accuracy for active power.
- When using the 200mA or 500mA range, add ±0.1% rdg. to current and active power for which 1kHz < f ≤ 10kHz.
- Values for voltage, current, and active power for which 0.1Hz ≤ f < 10Hz are for reference only.
- Values for voltage, current, and active power in excess of 220V or 20A for which 10Hz ≤ f < 16Hz are for reference only.
- Values for current and active power in excess of 20A for which 500Hz < f ≤ 50kHz are for reference only.
- Values for current and active power in excess of 15A for which 50kHz < f ≤ 100kHz are for reference only.
- Values for voltage and active power in excess of 750V for which 30kHz < f ≤ 100kHz are for reference only.

Guaranteed accuracy period	1 year
Post-adjustment accuracy guaranteed	6 months
Conditions of guaranteed accuracy	Temperature and humidity : 23°C ±5°C, 80% RH or less Warm-up time : 30 minutes Input : Sine wave input, power factor of 1, terminal-to-ground voltage of 0V, after zero adjustment; within range in which the fundamental wave satisfies synchronization source conditions
Temperature characteristic	±0.03% f.s. per °C or less
Power factor effects	±0.1% f.s. or less (45 to 66 Hz, at power factor = 0) Internal circuitry voltage/current phase difference: ±0.0573°
Effect of common mode voltage	±0.02% f.s. or less (600 V, 50/60 Hz, applied between input terminals and enclosure)
Effect of external magnetic field interference	400 A/m, DC and 50/60 Hz magnetic field Voltage : ±1.5% f.s. or less Current : ±1.5% f.s. or ±10 mA, whichever is greater, or less Active power : ±3.0% f.s. or (voltage influence quantity) × (±10 mA), whichever is greater, or less
Magnetization effect	±10 mA equivalent or less (after inputting 100 A DC to the current direct input terminals)
Adjacent channel input effect	±10 mA equivalent or less (when inputting 50 A to adjacent channel)

**Voltage/ Current/ Active Power Measurement Specifications**

Measurement types	Rectifiers: AC+DC, DC, AC, FND, AC+DC Umn
Effective measuring range	Voltage : 1% to 130% of range (however, up to ±1500 V peak value and 1000 V RMS value) Current : 1% to 130% of range Active power: 0% to 169% of the range (However, defined when the voltage and current fall within the effective measurement range.)
Display range	Voltage/ Current : 0.5% to 140% of range (zero-suppression when less than 0.5%) Active power : 0% to 196% of the range (no zero-suppression)
Polarity	Voltage/ Current : Displayed when using DC rectifier Active power : +: Positive: Power consumption (no polarity display) -: generation or regenerated power

**Voltage/ Current/ Active power channel and sum value calculation formulas**

Wiring	X: U (Voltage) or I (Current)	P (Active power)
All channels	1P2W $X_{(i)}$	$P_{(i)}$
Sum values	1P3W 3P3W	$X_{sum} = \frac{1}{2} (X_{(1)} + X_{(2)})$
	3P3W2M	$P_{sum} = (P_{(1)} + P_{(2)})$
	3V3A	
	3P3W3M	
	3P4W	
	$X_{sum} = \frac{1}{3} (X_{(1)} + X_{(2)} + X_{(3)})$	$P_{sum} = (P_{(1)} + P_{(2)} + P_{(3)})$

(i) : Measurement channel

**Frequency Measurement Specifications**

Number of measurement channels	3
Measurement source	Select from U (VHz) or I (AHz) by channel
Measurement method	Calculated from input waveform period (reciprocal method)
Measurement range	500 Hz/200 kHz (linked to zero-cross filter)
Measurement accuracy	±0.1% rdg. ±1 dgt. (0°C to 40°C)
Effective measuring range	0.1 Hz to 100 kHz For sine wave input that is at least 20% of the measurement source's measurement range. Measurement lower limit frequency setting: 0.1 sec. / 1 sec. / 10 sec.
Display format	0.1000 Hz to 9.9999 Hz, 9.900 Hz to 99.999 Hz, 99.00 Hz to 999.99 Hz, 9900 kHz to 9.9999 kHz, 9.900 kHz to 99.999 kHz, 99.00 kHz to 220.00 kHz

**Apparent Power/ Reactive Power/ Power Factor/ Phase Angle Measurement Specifications**

Measurement types	Rectifiers Apparent Power/ Reactive Power/ Power Factor: AC+DC, AC, FND, AC+DC Umn Phase Angle : AC, FND
Effective measuring range	As per voltage, current, and active power effective measurement ranges.
Display range	Apparent Power/ Reactive Power : 0% to 196% of the range (no zero-suppression) Power Factor : ±0.0000 to ±1.0000 Phase Angle : +180.00 to -180.00
Polarity	Reactive Power/ Power Factor/ Phase Angle Polarity is assigned according to the lead/lag relationship of the voltage waveform rising edge and the current waveform rising edge. + : When current lags voltage (no polarity display) - : When current leads voltage

**Power channel and sum value calculation formulas**

Wiring	S : Apparent power	Q : Reactive power
All channels	$S_{(i)} = U_{(i)} \times I_{(i)}$	$Q_{(i)} = s_{(i)} \sqrt{S_{(i)}^2 - P_{(i)}^2}$
Sum values	1P3W 3P3W	$Q_{sum} = Q_{(1)} + Q_{(2)}$
	3P3W2M	
	3V3A	
	3P3W3M	
	3P4W	
	$S_{sum} = S_{(1)} + S_{(2)} + S_{(3)}$	$Q_{sum} = Q_{(1)} + Q_{(2)} + Q_{(3)}$

(i) : Measurement channel

Wiring	λ : Power factor	φ : Phase angle
All channels	1P2W $\lambda_{(i)} = \frac{P_{(i)}}{S_{(i)}}$	$\phi_{(i)} = \sin^{-1}   \lambda_{(i)}  $
Sum values	1P3W	When $P_{sum} \geq 0$ $\phi_{sum} = \cos^{-1}   \lambda_{sum}  $ (0° to ±90°) When $P_{sum} < 0$ $\phi_{sum} = \sin^{-1}   \lambda_{sum}  $ (±90° to ±180°)
	3P3W	
	3P3W2M	
	3V3A	
	3P3W3M	
3P4W	$\lambda_{sum} = \frac{P_{sum}}{S_{sum}}$	

(i) : Measurement channel ; The polarity symbol  $s_{sum}$  is acquired from the  $Q_{sum}$  symbol.

**Voltage Waveform Peak Value / Current Waveform Peak Value Measurement Specifications**

Measurement method	Measures the waveform's peak value (for both positive and negative polarity) based on sampled instantaneous voltage values.
Sampling frequency	Approx. 700 kHz
Range configuration	
Voltage peak range	
Voltage range	15V 30V 60V 150V 300V 600V 1000V
Voltage peak range	90.000V 180.00V 360.00V 900.00V 1.8000kV 3.6000kV 6.0000kV
Current peak range	
Current range	200mA 500mA 1A 2A 5A 10A 20A 50A
Current peak range	1.2000A 3.0000A 6.0000A 12.000A 30.000A 60.000A 120.00A 300.00A
Measurement accuracy	Same as the voltage or current measurement accuracy at DC and when 10 Hz ≤ f ≤ 1 kHz (f.s.: voltage peak range or current peak range). Provided as reference value when 0.1 Hz ≤ f < 10 Hz and when in excess of 1 kHz.
Effective measuring range	±5% to ±100% of voltage peak range (up to ±1500 V) or ±5% to ±100% of current peak range (up to ±100 A)
Display range	±0.3% to ±102% of voltage peak range or current peak range (values less than ±0.3% are subject to zero-suppression)

**Voltage Crest Factor/ Current Crest Factor Measurement Specifications**

Measurement method	Calculates values from display values once each display update interval for voltage and voltage waveform peak values or current and current waveform peak values.
Effective measuring range	As per voltage and voltage waveform peak value or current and current waveform peak value effective measurement ranges.
Display range	1.0000 to 612.00 (no polarity)

**Synchronized Control**

Functions	Timing of calculations, display updates, data updates, integration start/stop/reset events, display hold operation, key lock operation, and zero-adjustment operation for the slave PW3336/PW3337 are synchronized with the master PW3336/PW3337.
Terminal	BNC terminal × 1 (non-isolated)
Terminal name	EXT SYNC
I/O settings	Off: Synchronized control function off In : The EXT SYNC terminal is set to input, and a dedicated synchronization signal can be input (slave). Out: The EXT SYNC terminal is set to output, and a dedicated synchronization signal can be output (master).
Number of units for which synchronized control can be performed	1 master unit and 7 slave units (total 8 units)



## Voltage Ripple Rate / Current Ripple Factor Measurement Specifications

Measurement method	Calculates the AC component (peak to peak [peak width]) as a proportion of the voltage or current DC component
Effective measuring range	As per voltage and voltage waveform peak value or current and current waveform peak value effective measurement ranges
Display range	0.00[%] to 500.00[%]
Polarity	None

## Efficiency Measurement Specifications

Measurement method	Calculates the efficiency $\eta$ [%] from the ratio of active power values for channels and wires				
Wiring modes and calculation equations	Calculated based on the AC+DC rectifier active power				
	PW3336 series				
	Wiring (WIRING)	CH1	CH2	Calculation formulas	
	1P2W $\times$ 2	1P2W	1P2W	$\eta_1 = 100 \times  P_2  /  P_1 $ $\eta_2 = 100 \times  P_1  /  P_2 $	
	1P3W	1P3W			
	3P3W	3P3W			
	3P3W2M	3P3W2M			
	PW3337 series				
	Wiring (WIRING)	CH1	CH2	CH3	Calculation formulas
	1P2W $\times$ 3	1P2W	1P2W	1P2W	$\eta_1 = 100 \times  P_3  /  P_1 $ $\eta_2 = 100 \times  P_1  /  P_3 $
	1P3W & 1P2W	1P3W		1P2W	$\eta_1 = 100 \times  P_3  /  P_{sum} $ $\eta_2 = 100 \times  P_{sum}  /  P_3 $
	3P3W & 1P2W	3P3W		1P2W	
	3P3W2M	3P3W2M			
	3V3A	3V3A			
	3P3W3M	3P3W3M			
	3P4W	3P4W			
Effective measuring range	As per the active power effective measurement range.				
Display range	0.00[%] to 200.00[%]				

## Functional Specifications

Auto-range (AUTO)	Automatically changes the voltage and current range for each wiring mode according to the input Range up : The range is increased when input exceeds 130% of the range or when the peak is exceeded. Range down : The range is decreased when input falls below 15% of the range. However, the range is not decreased when the peak is exceeded at the lower range.																
Averaging (AVG)	Averages the voltage, current, active power, apparent power, and reactive power. The power factor and phase angle are calculated from averaged data. Measured values other than peak values, power factor, frequency, integrated values, T.AV, crest factor, ripple rate, total harmonic distortion, and harmonics are averaged. Method : Simple averaging Number of averaging iterations and display update interval <table border="1"> <tr> <td>Number of averaging iterations</td> <td>1</td> <td>2</td> <td>5</td> <td>10</td> <td>25</td> <td>50</td> <td>100</td> </tr> <tr> <td>Display update interval</td> <td>200ms</td> <td>400ms</td> <td>1s</td> <td>2s</td> <td>5s</td> <td>10s</td> <td>20s</td> </tr> </table>	Number of averaging iterations	1	2	5	10	25	50	100	Display update interval	200ms	400ms	1s	2s	5s	10s	20s
Number of averaging iterations	1	2	5	10	25	50	100										
Display update interval	200ms	400ms	1s	2s	5s	10s	20s										
Scaling (VT, CT)	Applies user-defined VT and CT ratio settings to measured values. These settings can be configured separately for each wiring mode. VT ratio setting range : OFF (1.0), 0.1 to 1000 (setting: 0000) CT ratio setting range : OFF (1.0), 0.001 to 1000 (setting: 0000)																
HOLD (HOLD)	Stops display updates for all measured values and fixes the display values at that point in time. Measurement data acquired by communications is also fixed at that point in time. Internal calculations (including integration and integration elapsed time) will continue. Analog output and waveform output are not held.																
Maximum value/minimum value hold (MAX/MIN HOLD)	Detects maximum and minimum measured values as well as maximum and minimum values for the voltage and current waveform peak and holds them on the display. For data with polarity, display of the maximum value and minimum value for the data's absolute values is held (so that both positive and negative polarity values are shown). Internal calculations (including integration and integration elapsed time) will continue. Analog output and waveform output are not held.																
Zero Adjustment (0 ADJ)	Degausses the current input unit DCCT and then zeroes out the current input offset.																
Key-lock (KEY LOCK)	Disables key input in the measurement state, except for the SHIFT key and KEY LOCK key.																
Backup	Backs up settings and integration data if the instrument is turned off and if a power outage occurs.																
System Reset	Initializes the instrument's settings. Communications-related settings (communications speed, address, and LAN-related settings) are not initialized.																

## Integration Measurement Specifications

Measurement types	Rectifiers: AC+DC, AC+DC Umn Current: Displays the result of integrating current RMS value data (display values) once every display update interval (approx. 200 ms) as an integrated value. Active power: Displays the result of integrating active power values by polarity calculated once every cycle for the selected synchronization source as integrated values. Rectifier: DC Displays the result of integrating instantaneous data obtained by sampling both current and active power by polarity as integrated values (When the active power contains both AC and DC, the DC component will not be integrated)
-------------------	--

## Integration Measurement Specifications

Measurement items	Simultaneous integration of the following 6 parameters for each channel (total of 18 parameters): Sum of current integrated values (displayed as Ah on panel display) Positive current integrated value (displayed as Ah+ on panel display) Negative current integrated value (displayed as Ah- on panel display) Sum of active power integrated values (displayed as Wh on panel display) Positive active power integrated value (displayed as Wh+ on panel display) Negative active power integrated value (displayed as Wh- on panel display)
Integration time	1 min. to 10000 hr., settable in 1 min. blocks
Integration time accuracy	$\pm 100$ ppm $\pm 1$ dgt. (0°C to 40°C)
Integration measurement accuracy	(Current or active power measurement accuracy) + ( $\pm 0.01\%$ rdg. $\pm 1$ dgt.)
Effective measuring range	Until PEAK OVER U or PEAK OVER I occurs
Display resolution	999999 (6 digits + decimal point)
Functions	Stopping integration based on integration time setting (timer) Displaying the integration elapsed time (displayed as TIME on panel display) Additional integration by repeatedly starting/stopping integration Backing up integrated values and the integration elapsed time during power outages Stopping integration when power returns
External control	Stopping/starting integration and resetting integrated values based on external control
Measuring range	Corresponds to the range set for START integration

## Time Average Current / Time Average Active Power Measurement Specifications (T.AV)

Measurement method	Calculates the average by dividing the integrated value by the integration time
Measurement accuracy	$\pm$ (Current or active power measurement accuracy) $\pm$ ( $\pm 0.01\%$ rdg. $\pm 1$ dgt.)
Effective measuring range	As per the current or active power effective measurement range

## Harmonic Measurement Specifications (built-in function)

Measurement method	Zero-cross simultaneous calculation method (separate windows by channel according to the wiring mode) Uniform thinning between zero-cross events after processing with a digital antialiasing filter Interpolation calculations (Lagrange interpolation) When the synchronization frequency falls within the 45 Hz to 66 Hz range » IEC 61000-4-7:2002 compliant » Gaps and overlaps may occur if the measurement frequency is not 50 Hz or 60 Hz When the synchronization frequency falls outside the 45 Hz to 66 Hz range » No gaps or overlap will occur	
Synchronization source	Conforms to synchronization source (SYNC) for the basic measurement specifications	
Measurement channels	3	
Measurement items	<ul style="list-style-type: none"> <li>Harmonic voltage RMS value</li> <li>Harmonic voltage phase angle</li> <li>Harmonic current content %</li> <li>Harmonic current phase angle</li> <li>Harmonic active power</li> <li>Harmonic active power content %</li> <li>Harmonic voltage current phase difference</li> <li>Total harmonic voltage distortion</li> <li>Total harmonic current distortion</li> <li>Voltage fundamental waveform</li> <li>Current fundamental waveform</li> <li>Active power fundamental waveform</li> <li>Apparent power fundamental waveform</li> <li>Reactive power fundamental waveform</li> <li>Power factor fundamental waveform</li> <li>Voltage current phase difference fundamental waveform</li> <li>Interchannel voltage fundamental wave phase difference</li> <li>Interchannel current fundamental wave phase difference</li> </ul> The following parameters can be downloaded as data during PC communication but not displayed: <ul style="list-style-type: none"> <li>Harmonic voltage phase angle</li> <li>Harmonic current phase angle</li> <li>Harmonic voltage current phase difference</li> </ul>	
FFT processing word length	32 bits	
Number of FFT points	4096	
Window function	Rectangular	
Analysis window width	45 Hz $\leq$ f < 56 Hz      178.57 ms to 222.22 ms (10 cycles) 56 Hz $\leq$ f < 66 Hz      181.82 ms to 214.29 ms (12 cycles) Frequencies other than the above    185.92 ms to 214.08 ms	
Data update rate	Depends on window width	
Synchronization frequency range	10 Hz to 640 Hz	
Maximum analysis order	Synchronization frequency (f) range	Analysis order
	10 Hz $\leq$ f < 45 Hz	50th
	45 Hz $\leq$ f < 56 Hz	50th
	56 Hz $\leq$ f $\leq$ 66 Hz	50th
	66 Hz < f $\leq$ 100 Hz	50th
	100 Hz < f $\leq$ 200 Hz	40th
	200 Hz < f $\leq$ 300 Hz	25th
	300 Hz < f $\leq$ 500 Hz	15th
	500 Hz < f $\leq$ 640 Hz	11th
Analysis order upper limit setting	2nd to 50th	
Measurement accuracy	f.s.: Measurement range	
	Frequency (f)	Voltage, Current, Active power
	DC	$\pm 0.4\%$ rdg. $\pm 0.2\%$ f.s.
	10 Hz $\leq$ f < 30 Hz	$\pm 0.4\%$ rdg. $\pm 0.2\%$ f.s.
	30 Hz $\leq$ f $\leq$ 400 Hz	$\pm 0.3\%$ rdg. $\pm 0.1\%$ f.s.
	400 Hz < f $\leq$ 1 kHz	$\pm 0.4\%$ rdg. $\pm 0.2\%$ f.s.
	1 kHz < f $\leq$ 5 kHz	$\pm 1.0\%$ rdg. $\pm 0.5\%$ f.s.
	5 kHz < f $\leq$ 8 kHz	$\pm 4.0\%$ rdg. $\pm 1.0\%$ f.s.
	For DC, add $\pm 1$ mA to current and ( $\pm 1$ mA) $\times$ (voltage read value) to active power.	

## Display Specifications

Display	7-segment LED
Number of display parameters	4
Display resolution	Other than integrated values: 99999 count Integrated values: 999999 count
Display update rate	200 ms $\pm$ 50 ms (approx. 5 updates per sec.) to 20 s (varies with number of averaging iterations setting)

## External Current Sensor Input Specifications (built-in feature)

Terminal	Isolated BNC terminals, 1 for each channel		
Current sensor type switching	Off / Type 1 / Type 2 When set to off, input from the external current sensor input terminal is ignored.		
Current sensor options	TYPE1 (100 A to 5000 A sensors) 9660, 9661, 9669, CT9667-01/02/03 TYPE2 (20 A to 1000 A sensors, Power supply is required to use) 9272-10, 9709 CT6841, CT6843, CT6844, CT6845, CT6846 CT6862, CT6863, CT6865		
Current measurement range	Auto / 10 A / 20 A / 50 A (range noted on panel) User-selectable for each wiring mode. Can be read directly by manually setting the CT ratio.		
Power range configuration	Depends on the combination of voltage and current ranges; from 60.000W to 15.000MW (also applies to VA, var)		
Measurement accuracy			
Current, Active power			
Frequency	Input < 50% f.s.	50% f.s. ≤ Input < 100% f.s.	100% f.s. ≤ Input
DC	±0.2%rdg. ±0.6%f.s.	±0.2%rdg. ±0.6%f.s.	±0.8%rdg.
0.1Hz ≤ f < 16Hz	±0.2%rdg. ±0.2%f.s.	±0.4%rdg.	±0.4%rdg.
16Hz ≤ f < 45Hz	±0.2%rdg. ±0.2%f.s.	±0.4%rdg.	±0.4%rdg.
45Hz ≤ f ≤ 66Hz	±0.2%rdg. ±0.1%f.s.	±0.3%rdg.	±0.3%rdg.
66Hz < f ≤ 500Hz	±0.2%rdg. ±0.2%f.s.	±0.4%rdg.	±0.4%rdg.
500Hz < f ≤ 1kHz	±0.2%rdg. ±0.3%f.s.	±0.5%rdg.	±0.5%rdg.
1kHz < f ≤ 10kHz	±5.0%rdg.	±5.0%rdg.	±5.0%rdg.
10kHz < f ≤ 50kHz			
50kHz < f ≤ 100kHz			
	f.s.: Each measurement range <ul style="list-style-type: none"> <li>To obtain the current or active power accuracy, add the current sensor's accuracy to the above current and active power accuracy figures.</li> <li>The effective measurement range and frequency characteristics conform to the current sensor's specifications.</li> <li>Values for current, and active power for which 0.1 Hz ≤ f &lt; 10 Hz are for reference only.</li> <li>Values for voltage in excess of 220 V active power for which 10 Hz ≤ f &lt; 16 Hz are for reference only.</li> </ul>		
Temperature characteristics	Current, active power : ±0.08% f.s./°C (instrument temperature coefficient); f.s.: instrument measurement range) Add current sensor temperature coefficient to above.		
Power factor effects	- Instrument: ±0.15% f.s. or less (45 Hz to 66 Hz with power factor = 0) - Internal circuit voltage/current phase difference: ±0.086° - Add the current sensor phase accuracy to the internal circuit voltage/current phase difference noted above.		
Current peak value measurement accuracy	-(External current sensor input instrument accuracy) + (±2.0% f.s.) (f.s.: current peak range) - Add the current sensor accuracy to the above.		
Harmonic measurement accuracy	Frequency	Voltage	Current, Active power
	DC	±0.4%rdg. ±0.2%f.s.	±0.6%rdg. ±0.8%f.s.
	10Hz ≤ f < 30Hz	±0.4%rdg. ±0.2%f.s.	±0.6%rdg. ±0.4%f.s.
	30Hz ≤ f ≤ 400Hz	±0.3%rdg. ±0.1%f.s.	±0.5%rdg. ±0.3%f.s.
	400Hz < f ≤ 1kHz	±0.4%rdg. ±0.2%f.s.	±0.6%rdg. ±0.5%f.s.
	1kHz < f ≤ 5kHz	±1.0%rdg. ±0.5%f.s.	±1.0%rdg. ±5.5%f.s.
	5kHz < f ≤ 8kHz	±4.0%rdg. ±1.0%f.s.	±2.0%rdg. ±6.0%f.s.
	f.s.: Each measurement range <ul style="list-style-type: none"> <li>To obtain the current or active power accuracy, add the current sensor's accuracy to the above current and active power accuracy figures.</li> </ul>		

## D/A Output Specifications (PW3336-02/03 and PW3337-02/03)

Number of output channels	16
Configuration	16-bit D/A converter (polarity + 15 bits)
Output parameters	U1 to U3 (voltage level) or u1 to u3 (instantaneous voltage waveform) (switchable) I1 to I3 (current level) or i1 to i3 (instantaneous current waveform) (switchable) P1 to P3 (active power level) or p1 to p3 (instantaneous power waveform) (switchable) Psum (active power level) or Hi-Psum (high-speed active power level) (switchable) Psum and Hi-Psum output is not available (0 V) when using the 1P2W wiring mode. P12 is output when using 1P3W, 3P3W, or 3P3W2M, and P123 is output when using 3V3A, 3P3W3M, or 3P4W. D/A1 to D/A3 : Select any 3 from channel or sum value for voltage, current, active power, apparent power, reactive power, power factor, phase angle, total harmonic voltage/current distortion, inter-channel voltage/current fundamental wave phase difference, voltage/current crest factor, time average current/active power, voltage/current ripple rate, frequency, efficiency, current integration, active power integration (harmonic output is not available for individual orders). Hi-P1 to Hi-P3 and Hi-Psum (high-speed active power level): Fixed to AC+DC For other level output, select AC+DC, AC+DC Umn, DC, AC, or fnd.
Output accuracy	f.s.: Relative to the output voltage rated value for each output parameter Level output : (Output parameter measurement accuracy) + (±0.2% f.s.) High-speed active power level output : (Output parameter measurement accuracy) + (±0.2% f.s.) Instantaneous waveform output : (Output parameter measurement accuracy) + (±1.0% f.s.) Instantaneous voltage, instantaneous current: RMS value level Instantaneous power: Average value level
Output frequency band	Instantaneous waveform output, high-speed active power level output At DC or 10 Hz to 5 kHz, accuracy is as defined above.

Output voltage	Level output Voltage, current, active power, apparent power, reactive power, time average current/active power : ±2 V DC for ±100% of range Power factor : ±2 V DC at ±0.0000, 0 V DC at ±1.0000 Phase angle : 0 V DC at 0.00°, ±2 V DC at ±180.00° Voltage/current ripple rate, total harmonic voltage/current distortion : + 2 V DC at 100.00% Voltage/current crest factor : + 2 V DC at 10.000 Frequency : Varies with measured value. + 2 V DC per 100 Hz from 0.1000 Hz to 300.00 Hz + 2 V DC per 10 kHz from 300.01 Hz to 30.000 kHz + 2 V DC per 100 kHz from 30.001 kHz to 220.00 kHz Efficiency : + 2 V DC at 200.00% Current integration, active power integration : ±5 V DC at (range) × (integration set time) Waveform output : 1 V f.s. relative to 100% of range
Maximum output voltage	Approx. ±12 V DC
Output update rate	Level output : Fixed at 200 ms ±50 ms (approx. 5 times per sec.) Update rate is unrelated to number of averaging iterations setting and display hold operation. Waveform output : Approx. 11.4 μs (approx. 87.5 kHz) High-speed P level : Updated once every cycle for the input waveform set as the synchronization source.
Response time	Level output : 0.6 sec. or less (when the input changes abruptly from 0% to 90%, or from 100% to 10%, the time required in order to satisfy the accuracy range) Waveform output : 0.2 ms or less High-speed active power level output : 1 cycle
Temperature characteristic	±0.05% f.s./°C or less
Output resistance	100 Ω ±5 Ω

## External control (built-in feature)

Functions	Integration start/stop, integration reset and hold via external control		
External control	Input signal level: 0 to 5 V (high-speed CMOS level or shorted [Lo]/open [Hi])		
	Functions	External control signal	External control terminal
	Start	Hi → Lo	START/STOP
	Stop	Lo → Hi	
	Reset	Lo interval of at least 200 ms	RESET
	Hold on	Hi → Lo	HOLD
	Hold off	Lo → Hi	

## GP-IB interface (PW3336-01/03, PW3337-01/03)

Method	IEEE488.1 1978 compliant; see IEEE488.2 1987 Interface functions: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0 Remote control by controller
Address	00 to 30

## RS-232C interface (built-in feature)

Connector	D-sub 9-pin connector × 1
Communication method	Full duplex, Start-stop synchronization, Stop bits: 1 (fixed), Data bits: 8 (fixed), Parity: None Remote control by controller
Communication Speed	9600bps/ 38400bps

## LAN interface (built-in feature)

Connector	RJ-45 connector × 1
Electrical Specifications	IEEE802.3 compliant
Transmission Method	10BASE-T/100BASE-TX (automatic detection)
Protocol	TCP/IP
Functions	HTTP server (remote operation, firmware updates) Dedicated ports (command control, data transfer) Remote control by controller (REMOTE lamp will light up.)

## General Specifications (product guaranteed for one year)

Operating environment	Indoors, altitude up to 2000 m (6562-ft.), pollution degree 2
Operating temperature and humidity	0 to 40°C (32 to 104°F), 80% RH or less (non-condensating)
Storage temperature and humidity	-10 to 50°C (14 to 122°F) 80% RH or less (non-condensating)
Dielectric strength	4290 Vrms AC (sensed current: 1 mA) Between voltage input terminals and (case, interface, and output terminals) Between current direct input terminals and (case, interface, and output terminals) Between voltage input terminals and current direct input terminals
Maximum rated voltage to earth	Voltage input terminal, Current direct input terminal Measurement category III 600 V (anticipated transient overvoltage 6000 V) Measurement category II 1000 V (anticipated transient overvoltage 6000 V)
Maximum input voltage	Between voltage input terminals U: 1000 V, ±1500 Vpeak
Maximum input current	Between +/- current direct input terminals I: ±70 A, ±100 Apeak
Applicable Standards	Safety : EN61010, EMC : EN61326 Class A/ EN61000-3-2/ EN61000-3-3
Rated supply voltage	100 VAC to 240 VAC, Rated power supply frequency : 50/60 Hz
Maximum rated power	40 VA or less
Dimensions	Approx. 305W(12.01") × 132H(5.20") × 256D(10.08") mm (excluding protrusions)
Mass	PW3336 series Approx. 5.2 kg (183.4 oz.) PW3337 series Approx. 5.6 kg (197.5 oz.)
Accessories	Instruction manual × 1, Measurement guide × 1, Power cord × 1

**Shared options with the PW3336 and PW3337 series**

*f.s. is the sensor's rated primary current value.*

Can be connected to the current sensor input terminals

**Basic specifications** (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Model	9660	9661	9669	CT9667-01	CT9667-02	CT9667-03
Image						
Primary current rating	100 A AC	500 A AC	1000 A AC	5000 A AC/ 500 A AC		
Frequency characteristics	40 Hz to 5 kHz: ±1.0 % (deviation from accuracy)	40 Hz to 5 kHz: ±1.0 % (deviation from accuracy)	40 Hz to 5 kHz: ±2.0 % (deviation from accuracy)	10 Hz to 20 kHz (±3dB)		
Amplitude accuracy	±0.3 % rdg. ±0.02 % f.s. (45 to 66 Hz)	±0.3 % rdg. ±0.01 % f.s. (45 to 66 Hz)	±1.0 % rdg. ±0.01 % f.s. (45 to 66 Hz)	±2 % rdg. ±0.3 % f.s. (45 to 66 Hz, at center of flexible loop)		
Phase accuracy	±1° (45 Hz to 5 kHz)	±0.5° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±1° (45 to 66 Hz)		
Core diameter	φ 15 mm (0.59 in)	φ 46 mm (1.81 in)	φ 55 mm (2.17 in) or 80 mm (3.15 in) × 20 mm (0.79 in) bus-bar	φ 100 mm (3.94 in)	φ 180 mm (7.09 in)	φ 254 mm (10.00 in)
Operating temperature	0°C to 50°C (32°F to 122°F)	0°C to 50°C (32°F to 122°F)	0°C to 50°C (32°F to 122°F)	-25°C to 65°C (-13°F to 149°F)	-25°C to 65°C (-13°F to 149°F)	-10°C to 50°C (14°F to 122°F)
Power supply	Not required	Not required	Not required	LR6 (AA) alkaline batteries ×2, Continuous use: 7 days (rated power 35 mVA), or AC adapter 9445-02/-03 (rated power 0.2 VA), or External power supply 5 to 15 V DC (rated power 0.2 VA)		
Dimensions and mass	46 mm (1.81 in)W × 135 mm (5.31 in)H × 21 mm (0.83 in)D, 230 g (8.1 oz) Cord length 3 m (9.84 ft), Output terminal: BNC	78 mm (3.07 in)W × 152 mm (5.98 in)H × 42 mm (1.65 in)D, 380 g (13.4 oz) Cord length 3 m (9.84 ft), Output terminal: BNC	99.5 mm (3.92 in)W × 188 mm (7.40 in)H × 42 mm (1.65 in)D, 590 g (20.8 oz) Cord length 3 m (9.84 ft), Output terminal: BNC	Flexible loop cable diameter: φ7.4 mm (0.29 in), Cable length: Between flexible loop and battery box: 2 m (6.56 ft), Output cable: 1 m (3.28 ft), Battery box: 35 mm (1.38 in)W × 120.5 mm (4.74 in)H × 34 mm (1.34 in)D, 280 g (9.9 oz)		Flexible loop cable diameter: φ13 mm (0.51 in), Cable length: Between flexible loop and battery box: 2 m (6.56 ft), Output cable: 1 m (3.28 ft), Battery box: 35 mm (1.38 in)W × 120.5 mm (4.74 in)H × 34 mm (1.34 in)D, 470 g (16.6 oz)

**Up to 200 A**

\*Requires Sensor Unit 9555-10 and Connection Cord L9217

**Basic specifications** (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

(Accuracy guaranteed for 6 months, Post-adjustment accuracy guaranteed for 6 months)

Model	CT6862	CT6863	CT6841	CT6843	9272-10
Image					
Rated current	50 A AC/DC	200 A AC/DC	20 A AC/DC	200 A AC/DC	20 A AC, or 200 A AC (selectable)
Frequency characteristics	Amplitude: DC to 1 MHz Phase: DC to 300 kHz	Amplitude: DC to 500 kHz Phase: DC to 300 kHz	Amplitude: DC to 1 MHz Phase: DC to 300 kHz	Amplitude: DC to 500 kHz Phase: DC to 300 kHz	1 Hz (±2 % rdg. ±0.1 % f.s.) to 100 kHz (±30 % rdg. ±0.1 % f.s.)
Amplitude and Phase accuracy	DC ±0.05 % rdg. ±0.01 % f.s. (Phase: Not defined) 16 Hz ≤ f ≤ 400 Hz ±0.05 % rdg. ±0.01 % f.s. (Phase: ±0.2°) Defined to 1 MHz (CT6862), Defined to 500 kHz (CT6863)	DC ±0.3 % rdg. ±0.05 % f.s. DC < f ≤ 100 Hz ±0.3 % rdg. ±0.01 % f.s. (Phase: ±0.1°) Defined to 1 MHz	DC ±0.3 % rdg. ±0.05 % f.s. DC < f ≤ 100 Hz ±0.3 % rdg. ±0.01 % f.s. (Phase: ±0.1°) Defined to 1 MHz	DC ±0.3 % rdg. ±0.02 % f.s. DC < f ≤ 100 Hz ±0.3 % rdg. ±0.01 % f.s. (Phase: ±0.2°) Defined to 500 kHz	Amplitude: ±0.3 % rdg. ±0.01 % f.s. Phase: ±0.2° (45 to 66 Hz)
Core diameter	φ 24 mm (0.94 in)	φ 20 mm (0.79 in)	φ 20 mm (0.79 in)	φ 20 mm (0.79 in)	φ 46 mm (1.81 in)
Operating temperature	-30°C to 85°C (-22°F to 185°F)	-40°C to +85°C (-40°F to 185°F)	-40°C to +85°C (-40°F to 185°F)	-40°C to +85°C (-40°F to 185°F)	0°C to 50°C (32°F to 122°F)
Power supply	±11 V to ±15 V DC (Power supplied via the 9555-10)	±11 V to ±15 V DC (Power supplied via the 9555-10)	±11 V to ±15 V DC (Power supplied via the 9555-10)	±11 V to ±15 V DC (Power supplied via the 9555-10)	±11 V to ±15 V DC (via the 9555-10)
Power consumption	5 VA max.	6 VA max.	5 VA max.	6 VA max.	5 VA max.
Dimensions and mass	70 mm (2.76 in)W × 100 mm (3.94 in)H × 53 mm (2.09 in)D, 340 g (12.0 oz), cord length: 3 m (9.84 ft)	70 mm (2.76 in)W × 100 mm (3.94 in)H × 53 mm (2.09 in)D, 350 g (12.3 oz), cord length: 3 m (9.84 ft)	153 mm (6.02 in)W × 67 mm (2.64 in)H × 25 mm (0.98 in)D, 350 g (12.3 oz), cord length: 3 m (9.84 ft)	153 mm (6.02 in)W × 67 mm (2.64 in)H × 25 mm (0.98 in)D, 370 g (13.1 oz), cord length: 3 m (9.84 ft)	78 mm (3.07 in)W × 188 mm (7.40 in)H × 35 mm (1.38 in)D, 430 g (15.2 oz), cord length: 3 m (9.84 ft)

**Up to 500 A**

\*Requires Sensor Unit 9555-10 and Connection Cord L9217

**Basic specifications**

(Accuracy guaranteed for 6 months, Post-adjustment accuracy guaranteed for 6 months) (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Model	9709	CT6844	CT6845
Image			
Rated current	500 A AC/DC	500 A AC/DC	500 A AC/DC
Frequency characteristics	Amplitude: DC to 100 kHz Phase: DC to 100 kHz	Amplitude: DC to 200 kHz Phase: DC to 200 kHz	Amplitude: DC to 100 kHz Phase: DC to 100 kHz
Amplitude and Phase accuracy	DC, 45 Hz ≤ f ≤ 66 Hz (±0.05 % rdg. ±0.01 % f.s. (Phase: ±0.2°)) Defined to 100 kHz	DC ±0.3 % rdg. ±0.02 % f.s. DC < f ≤ 100 Hz ±0.3 % rdg. ±0.01 % f.s. (Phase: ±0.1°) Defined to 200 kHz	DC ±0.3 % rdg. ±0.02 % f.s. DC < f ≤ 100 Hz ±0.3 % rdg. ±0.01 % f.s. (Phase: ±0.1°) Defined to 100 kHz
Core diameter	φ 36 mm (1.42 in)	φ 20 mm (0.79 in)	φ 50 mm (1.97 in)
Operating temperature	0°C to 50°C (32°F to 122°F)	-40°C to 85°C (-40°F to 185°F)	-40°C to 85°C (-40°F to 185°F)
Power supply	±11 V to ±15 V DC (via the 9555-10)	±11 V to ±15 V DC (Power supplied via the 9555-10)	±11 V to ±15 V DC (Power supplied via the 9555-10)
Power consumption	5 VA max.	7 VA max.	7 VA max.
Dimensions and mass	160 mm (6.30 in)W × 112 mm (4.41 in)H × 50 mm (1.97 in)D, 850 g (30.0 oz), cord length: 3 m (9.84 ft)	153 mm (6.02 in)W × 67 mm (2.64 in)H × 25 mm (0.98 in)D, 400 g (14.1 oz), cord length: 3 m (9.84 ft)	238 mm (9.37 in)W × 116 mm (4.57 in)H × 35 mm (1.38 in)D, 860 g (30.3 oz), cord length: 3 m (9.84 ft)

**Up to 1000 A**

\*Requires Sensor Unit 9555-10 and Connection Cord L9217

**Basic specifications**


(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Model	CT6865	CT6846
Image		
Rated current	1000 A AC/DC	1000 A AC/DC
Frequency characteristics	Amplitude: DC to 20 kHz Phase: DC to 1 kHz	Amplitude: DC to 20 kHz Phase: DC to 20 kHz
Amplitude and Phase accuracy	DC ±0.05 % rdg. ±0.01 % f.s. 16 Hz ≤ f ≤ 66 Hz ±0.05 % rdg. ±0.01 % f.s., Phase: ±0.2° Amplitude is defined to 20 kHz, Phase is defined to 1 kHz	DC ±0.3 % rdg. ±0.02 % f.s. DC < f ≤ 100 Hz ±0.3 % rdg. ±0.01 % f.s. (Phase: ±0.1°) Defined to 20 kHz
Core diameter	φ 36 mm (1.42 in)	φ 50 mm (1.97 in)
Operating temperature	-30°C to 85°C (-22°F to 185°F)	-40°C to 85°C (-40°F to 185°F)
Power supply	±11 V to ±15 V DC (via the 9555-10)	±11 V to ±15 V DC (via the 9555-10)
Power consumption	7 VA max.	7 VA max.
Dimensions and mass	160 mm (6.30 in)W × 112 mm (4.41 in)H × 50 mm (1.97 in)D, 980 g (34.6 oz), cord length 3 m (9.84 ft)	238 mm (9.37 in)W × 116 mm (4.57 in)H × 35 mm (1.38 in)D, 990 g (34.9 oz), cord length: 3 m (9.84 ft)

**9555-10 Basic specifications**

Image, Compatible sensor		One of the CT6862 to CT6865 series, CT6841 to CT6846 series, 9709, 9277 to 9279 series, 9272-10, 9270 to 9272 series
Output Terminal	BNC Terminal	
Power supply	AC Adapter 9418-15, 100 to 240 V, 50/60 Hz, 20 VA	
Dimensions and mass	42 mm (1.65 in)W × 82 mm (3.27 in)H × 132 mm (5.20 in)D, 600 g (21.2 oz)	

**Connection Diagram (for High-precision current sensors)**

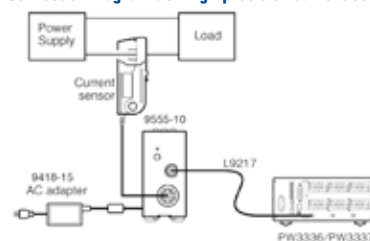

# Instrument



LAN  
RS-232C  
GP-IB /  
-01/-03 Model  
CE  
True RMS



LAN  
RS-232C  
GP-IB /  
-01/-03 Model  
CE  
True RMS

**Model : POWER METER PW3336**

Model No. (Order Code)	(Note)
PW3336	(2ch)
PW3336-01	(2ch, with GP-IB)
PW3336-02	(2ch, with D/A output)
PW3336-03	(2ch, with GP-IB, D/A output)

Accessories: Instruction manual ×1, Measurement guide ×1, Power cord ×1

**Model : POWER METER PW3337**

Model No. (Order Code)	(Note)
PW3337	(3ch)
PW3337-01	(3ch, with GP-IB)
PW3337-02	(3ch, with D/A output)
PW3337-03	(3ch, with GP-IB, D/A output)

Accessories: Instruction manual ×1, Measurement guide ×1, Power cord ×1

## Shared options for the POWER METER PW3336 and PW3337 series

**Current measurement**

Current sensors are compatible only with versions of Model PW3335 that include the external current sensor terminal.  
Can be connected to the current sensor input terminals (1 sensor necessary for single-phase measurement, and 2 or 3 sensors required for 3-phase measurements)

**CLAMP ON SENSOR 9660**  
100A AC rated current, φ 15 mm (0.59 in) core dia., 3 m (9.84 ft) length

**CLAMP ON SENSOR 9661**  
500A AC rated current, φ 46 mm (1.81 in) core dia., 3 m (9.84 ft) length

**FLEXIBLE CLAMP ON SENSOR CT9667-01/-02/-03**  
5000/500 A AC rated current, φ 100 mm (3.94 in) to 254 mm (10.0 in) core dia., Cable length: Between sensor - box 2 m (6.56 ft), Output cable 1 m (3.28 ft)

**CLAMP ON SENSOR 9669**  
1000A AC rated current, φ 55 mm (2.17 in) core dia., 3 m (9.84 ft) length

**High-Precision Current Sensors**

Current sensors are compatible only with versions of Model PW3335 that include the external current sensor terminal.  
\*Requires Sensor Unit 9555-10 and Connection Cord L9217  
(1 sensor necessary for single-phase measurement, and 2 or 3 sensors required for 3-phase measurements)

**Up to 200 A (High precision)**

- AC/DC CURRENT SENSOR CT6862**  
High-precision pull-through type, DC to 1 MHz, 50 A input, ±0.06% amplitude accuracy, ±0.2° phase accuracy
- AC/DC CURRENT SENSOR CT6863**  
High-precision pull-through type, DC to 500 kHz, 200 A input, ±0.06% amplitude accuracy, ±0.2° phase accuracy
- AC/DC CURRENT PROBE CT6841**  
DC to 1 MHz, 20 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy
- AC/DC CURRENT PROBE CT6843**  
DC to 500 kHz, 200 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy
- CLAMP ON SENSOR 9272-10**  
1 Hz to 100 kHz, 20/200 A switching input, ±0.3% amplitude accuracy, ±0.2° phase accuracy

**Up to 500 A (High precision)**

- AC/DC CURRENT SENSOR 9709**  
High-precision pull-through type, DC to 100 kHz, 500 A input, ±0.05% amplitude accuracy, ±0.2° phase accuracy
- AC/DC CURRENT PROBE CT6844**  
DC to 200 kHz, 500 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy
- AC/DC CURRENT PROBE CT6845**  
DC to 100 kHz, 500 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy

**Up to 1000 A (High precision)** \*When using the CT6865/CT6846, manual settings are required on the main device.

- AC/DC CURRENT SENSOR CT6865**  
High-precision pull-through type, DC to 20 kHz, 1000 A input, ±0.06% amplitude accuracy, ±0.2° phase accuracy
- AC/DC CURRENT PROBE CT6846**  
DC to 20 kHz, 1000 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy

**Power supply for sensors**

**SENSOR UNIT 9555-10**  
Power supply for the 9270 series, 9709, CT6860 series, single sensor connectable

**CONNECTION CORD L9217**  
Cord has insulated BNC connectors at both ends, for signal output, 1.6 m (5.25 ft) length

**PC Communication**

**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft) length

**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft) length

**RS-232C CABLE 9638**  
For the PC, 9pin - 25pin, cross, 1.8m (5.91 ft) length

**GP-IB CONNECTOR CABLE 9151-02**  
2m (6.56 ft) length

**Other options**

**Synchronize Multiple Units**

**CONNECTION CORD 9165**  
Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft) length, not CE marked

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

# HIOKI

HIOKI E. E. CORPORATION

**HEADQUARTERS**

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 FAX +81-268-28-0568  
http://www.hioki.com / E-mail: os-com@hioki.co.jp

**HIOKI USA CORPORATION**

TEL +1-609-409-9109 FAX +1-609-409-9108  
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.  
TEL +86-21-63910090 FAX +86-21-63910360  
http://www.hioki.cn / E-mail: info@hioki.com.cn

**DISTRIBUTED BY**

HIOKI SINGAPORE PTE. LTD.  
TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.  
TEL +82-2-2183-8847 FAX +82-2-2183-3360  
E-mail: info-kr@hioki.co.jp