

*20 A/200 A/2000 A, 100 mV/A, 10 mV/A, 1 mV/A*  
*For 3 phase power analyzer DW-6093, DW-6095*

# 2000 A CURRENT PROBE

Model : CP-2000

*ISO-9001, CE, IEC1010*



LUTRON ELECTRONIC

*The Art of Measurement*

# 2000 A/200 A/20 A

# 2000 Amp CURRENT PROBE

## Model : CP-2000

### FEATURES


* Range : 20 A/200 A/2000 A.
* Output sensitivity : 100 mV/A, 10 mV/A, 1 mV/A.
* Output voltage : 2 ACV ( 20 A, 200 A, 2000 A ).
* Max. conductor size : 51 mm ( 2.1 inch ) Dia.
* Operation frequency : 50 Hz/60 Hz.
* Optional current probe for DW-6093, DW-6095.
* When change the new probe, the calibration procedures are not necessary to be executed.
* Signal output use the banana plugs, durable and safety.
* Power supply is from the meter (DW-6093, DW-6095 ), battery is not necessary.

Operating Humidity	Less than 80% RH.
Dimension	240.8 x 90.9 x 38.3 mm. ( 9.48 x 3.58 x 1.5 inch ).
	<i>Cable length :</i> 4 meters ( 13.17 feet ).
	<i>DC plug size :</i> 5.5 mm x 2.5 mm DIA.
Weight	586 g ( 1.29 LB ).
Accessory Included	Operating manual ..... 1 PC.

### SPECIFICATIONS

Measurement ranges	20 A/200 A/2000 A, switch selectable
Output sensitivity	100 mV/A, 10 mV/A, 1 mV/A, AC coupled.
Accuracy	$\pm 1\%$ F.S. <i>* F.S. : Full scale of range.</i> <i>* 50/60 Hz..</i> <i>* <math>23 \pm 5^\circ C</math></i>
Frequency range	45 to 400 Hz. <i>* Accuracy tested under 50/60 Hz.</i>
Phase error	$< \pm 1^\circ$ <i>* 50/60 Hz..</i>
Minimum load	100 K ohm for specified accuracy.
Enclosure material	UL 94-V0 rated.
Safety	IEC 1010, Categories III 600V.
Power Supply	Power supply is from the meter (DW-6093, DW-6095 ), battery is not necessary. <i>* Power supply voltage from DW-6093, DW-6095 is DC 8V <math>\pm 1</math>V..</i>
Max. Jaw Open Size	51 mm ( 2.1 inch ) Dia.
Operating Temperature	0°C to 50°C ( 32°F to 122°F ).

### FRONT PANEL DESCRIPTIONS

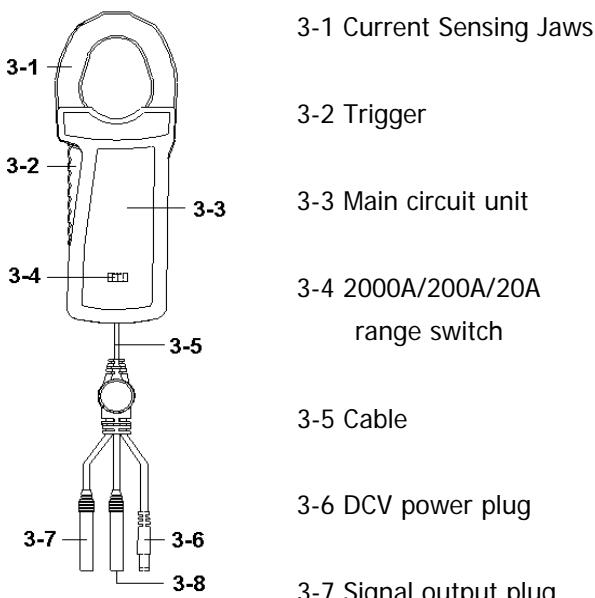

\* Appearance and specifications listed in this brochure are subject to change without notice.

1201-CP2000

### 2000 Amp current probe

#### Model : CP-2000

- \* Range : 20 A/200 A/2000 A.
- \* Output sensitivity :
  - 100 mV/A, 10 mV/A, 1 mV/A.
- \* Output voltage : 2 ACV ( 20 A, 200 A, 2000 A ).
- \* Max. conductor size : 51 mm ( 2.1 inch ) Dia.
- \* Operation frequency ; 50 Hz/60 Hz.
- \* Optional current probe for DW-6093, DW-6095.
- \* When change the new probe, the calibration procedures are not necessary.
- \* Output cable : 4 meters wire, used the banana plugs, durable and safety.
- \* Power supply is from the meter, battery is not necessary.



### 1200 Amp current probe

#### Model : CP-1201

- \* Range : 20 A/200 A/1200 A.
- \* Output sensitivity :
  - 10 mV/A, 1 mV/A, 0.1 mV/A.
- \* Output voltage :
  - 200 ACmV ( 20 A, 200 A ), 120 ACmV ( 1200 A ).
- \* Max. conductor size : 48 mm ( 1.9 inch ) Dia.
- \* Operation frequency : 50 Hz/60 Hz.
- \* Standard ( included ) current probe for DW-6093, DW-6095.
- \* Optional current probes for DW-6093, DW-6095.
- \* When change the new probe, the calibration procedures are not necessary.
- \* Output cable : 4 meters wire, used the banana plugs, durable and safety.
- \* Power supply is from the meter, battery is not necessary.



### 200 Amp current probe

#### Model : CP-200

- \* Range : 20 A/200 A.
- \* Output sensitivity : 10 mV/A, 1 mV/A.
- \* Output voltage : 200 ACmV ( 20 A, 200 A ).
- \* Max. conductor size : 19 mm ( 0.75 inch ) Dia.
- \* Operation frequency : 50 Hz/60 Hz.
- \* Optional current probes for DW-6093, DW-6095.
- \* When change the new probe, the calibration procedures are not necessary.
- \* Output cable : 1.5 meters wire, used the banana plugs, durable and safety.
- \* Battery is not necessary.

